

CAESAR Series LED Street Light



CAESAR series with integrally formed housing and external driver designed, it reduces the excess chamber makes the whole structure more light and handy. The distinctive outward appearance creates not only the good heat dissipation, but provides the high luminous efficiency.

Features

- ◆ High performance LEDs are used
- ◆ External driver ,easy for maintenance
- ◆ Patented optical lens reaches 95% light transmittance
- ◆ Efficient thermal management
- ◆ Powder coated meets 1000 hours ASTM B117 salt spray test
- ◆ Substantial energy & maintenance saving
- ◆ RoHS and CE compliant

General Specification


Input Voltage Range	100-277Vac
Input Frequency	50/60Hz
Power Factor	> 0.9
Total Harmonic Distortion	< 20%
Surge Protection	10KV
Color Temperature	5000K, Other color temperatures are optional
Ingress Protection Rating	IP66
Operating Temperature Range	-40°C to 50°C



Model Specification

Model Number	Power Consumption (W)	Luminous Flux (lm)	Weight (KG)
TSL-1035-03N	35	4,270	2.0
TSL-2070-03N	70	8,500	2.1
TSL-3100-03N	100	12,500	2.4
TSL-4135-03N	135	1,7000	2.8

Dimension (Unit :mm)

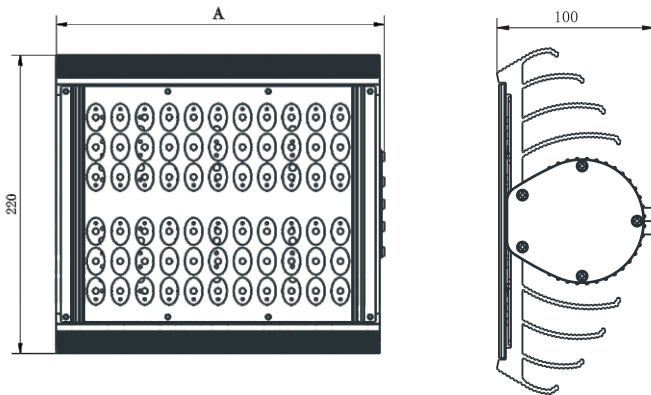

Model Number	A(mm)
TSL-1035-03N	169.5
TSL-2070-03N	169.5
TSL-3100-03N	205.0
TSL-4135-03N	240.0

Light Distribution

