

LED Canopy Light



Features

- ◆ Low copper content die-casting aluminum housing is protected by outdoor using powder coating
- ◆ Various optical lens design suitable for Petrol station, highway toll station, warehouse, shopping mall
- ◆ Adjustable bracket suitable for various opening size from 360mm up to 440mm
- ◆ Flexible fixture design for various ceiling thickness from 7 up to 47mm
- ◆ IP66 ingress rating
- ◆ IK08 impact resistance

General Specification

Input Voltage Range	100-240 Vac
Input Frequency	50-60Hz
Power Factor	> 0.9
Total Harmonic Distortion	< 20%
Surge Protection	4.0KV
Color Temperature	5000K, Other color temperatures are optional
Ingress Protection Rating	IP66
Operating Temperature Range	-40°C to 50°C
Light Distribution	Symmetry/Asymmetry

Application



- ◆ Gas station
- ◆ Petrol service station
- ◆ Car wash
- ◆ Public transportation station
- ◆ Highway toll station
- ◆ workshop
- ◆ Warehouse
- ◆ Shopping Malls



Model Specification

Model Number	Power Consumption (Watt)	Luminous Flux (lm)	Weight (Kg)
TCN-0802-B2	80	9,200	6.0
TCN-1002-B2	100	11,000	6.0
TCN-1202-B2	120	15,000	6.0
TCN-1502-B2	150	18,000	6.0

Light Distribution

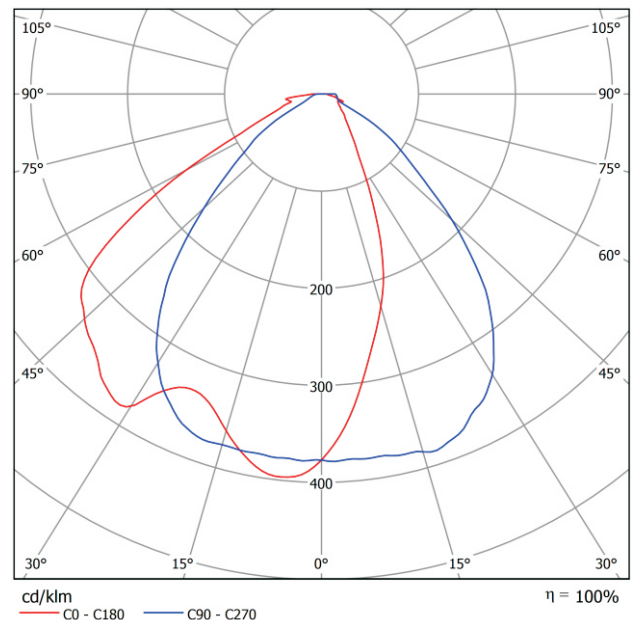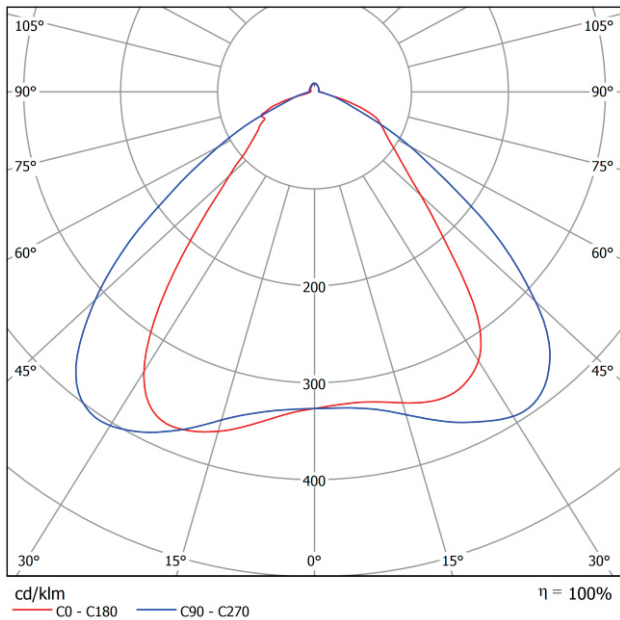

Dimension (Unit:mm)

